

Q.CELLS
YIELD SECURITY

- ✓ ANTI PID TECHNOLOGY (APT)
- ✓ HOT-SPOT PROTECT (HSP)
- ✓ TRACEABLE QUALITY (TRA.Q™)

MONOCRYSTALLINE SOLAR MODULE

Q.PEAK 245-265

High performance and reliability have a new name


The monocrystalline solar module **Q.PEAK** is our energy pack for residential rooftop installations. It is available in power classes up to 265 Wp - a record for 60-cell mono modules. **Q.PEAK** is the new standard for high performance and reliability because thanks to our innovative Q-Cells technologies, it is the worldwide first PID resistant¹ and Hot-Spot free solar module on the market. This makes **Q.PEAK** your safe choice for secure yields.

THE NEW Q-CELLS GENERATION

- Anti PID Technology (APT)¹: **No power loss caused by potential induced degradation.**
- Traceable Quality (Tra.Q™): **First traceable and forgery proof solar module on the market.**
- New cell concept with reduced serial resistance: **Increased power on module level.**

THE PROVEN Q-CELLS VALUES

- Hot-Spot Protect (HSP): **Increased fire and performance safety.**
- Positive sorting +5 W/-0 W: **Extra output.**
- Tested for wind/snow loads up to 5400 Pa: **Strong in every weather condition.**
- 25-year performance warranty, 10-year product warranty²: **Secure investment.**

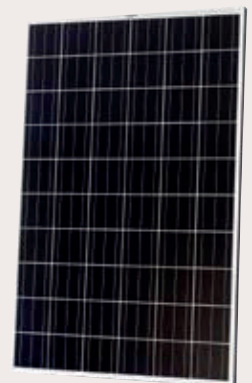

THE IDEAL
SOLUTION FOR:




ROOFTOP ARRAYS ON
RESIDENTIAL BUILDINGS

¹ APT test conditions: Cells at -600 V against frame, wet module surface, 25 °C, 300 h

² Performance warranty: min. 97 % of nominal power in year 1; max. 0.6 % degradation per year from year 2; min. 83 % of nominal power after 25 years. Full product and performance warranties in accordance with the valid regional warranty terms.

Q.CELLS

MECHANICAL SPECIFICATION	
Format	1670 mm x 1000 mm x 50 mm (including frame)
Weight	20 kg
Front Cover	3.2 mm thermally pre-stressed solar glass
Back Cover	Composite film
Frame	Anodized aluminum
Cell	6 x 10 monocrystalline solar cells
Junction box	116 mm x 153 mm x 20 mm Protection class IP 67, with bypass diodes
Cable	4 mm ² Solar cable; (+) 1100 mm, (-) 1100 mm
Connector	Yamaichi Y-SOL4 (combinable with MC4), IP 68
Grounding points	∅ 4.5 mm

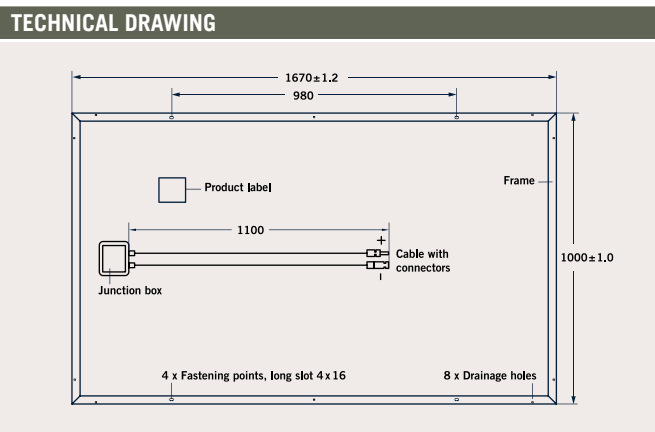

ELECTRICAL CHARACTERISTICS

PERFORMANCE AT STANDARD TEST CONDITIONS (STC: 1000 W/m², 25 °C, AM 1.5 SPECTRUM)¹


POWER CLASS			245	250	255	260	265
Nominal Power (+5 W / -0 W)	P_{MPP}	[W]	245	250	255	260	265
Short Circuit Current	I_{SC}	[A]	8.99	9.04	9.09	9.15	9.20
Open Circuit Voltage	U_{OC}	[V]	36.55	36.96	37.35	37.73	38.11
Current at Maximum Power	I_{MPP}	[A]	8.29	8.37	8.46	8.54	8.62
Voltage at Maximum Power	U_{MPP}	[V]	29.55	29.86	30.16	30.45	30.74
Efficiency	η	[%]	≥14.7	≥15.0	≥15.3	≥15.6	≥15.9

PERFORMANCE AT NORMAL OPERATING CELL TEMPERATURE (NOCT: 800 W/m², 47 ± 3 °C, AM 1.5 SPECTRUM)²

POWER CLASS			245	250	255	260	265
Nominal Power (+5 W / -0 W)	P_{MPP}	[W]	186	189	193	197	201
Short Circuit Current	I_{SC}	[A]	7.15	7.19	7.24	7.28	7.32
Open Circuit Voltage	U_{OC}	[V]	34.34	34.72	35.10	35.47	35.83
Current at Maximum Power	I_{MPP}	[A]	6.63	6.69	6.76	6.82	6.89
Voltage at Maximum Power	U_{MPP}	[V]	28.02	28.31	28.60	28.88	29.15


¹ Measurement tolerances STC: ±3 % (P_{MPP}); ±10 % (I_{SC}, V_{OC}, I_{MPP}, V_{MPP}) ² Measurement tolerances NOCT: ±5 % (P_{MPP}); ±10 % (I_{SC}, V_{OC}, I_{MPP}, V_{MPP})

PERFORMANCE AT LOW IRRADIANCE

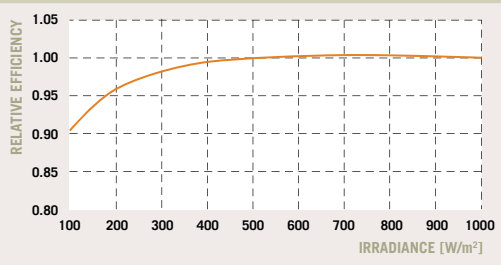

The typical change in module efficiency at an irradiance of 200 W/m² in relation to 1000 W/m² (both at 25 °C and AM 1.5 spectrum) is -4 % (relative).

TYPICAL CHARACTERISTICS AT DIFFERENT IRRADIANCES

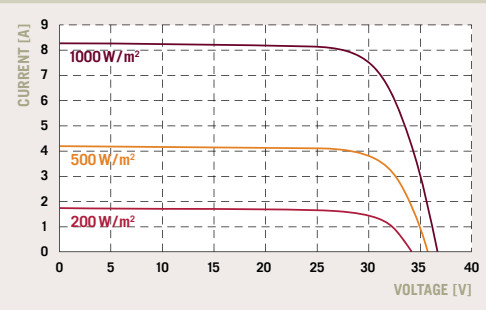

TEMPERATURE COEFFICIENTS (AT 1000 W/m², 25 °C, AM 1.5 SPECTRUM)

Temperature Coefficient of I_{SC}	α	[%/K]	+0.04	Temperature Coefficient of V_{OC}	β	[%/K]	-0.32
Temperature Coefficient of P_{MPP}	γ	[%/K]	-0.46				

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V_{sys}	[V]	1000	Safety Class	II
Maximum Reverse Current I_r	[A]	20	Fire Rating	C
Wind/Snow Load	[Pa]	5400	Permitted module temperature on continuous duty	-40 °C up to +85 °C

QUALIFICATIONS AND CERTIFICATES

IEC 61215 (Ed.2); IEC 61730 (Ed.1), Application class A
This data sheet complies with DIN EN 50380.



PARTNER

NOTE: Installation instructions must be followed. See the installation and operating manual or contact the technical service for further information on approved installation and use of this product.

Distribution by

SAT Solar

www.sat-solar.ch
Tel: +41 (0)716693750
sales@sat-solar.ch



Specifications subject to technical changes © Q.CELLS SE Q.PEAK_EN_2011-09_04